


## 3/4" VALVES WITH THREADED CONNECTION REMOTE PILOT

AE 28 20 B 000

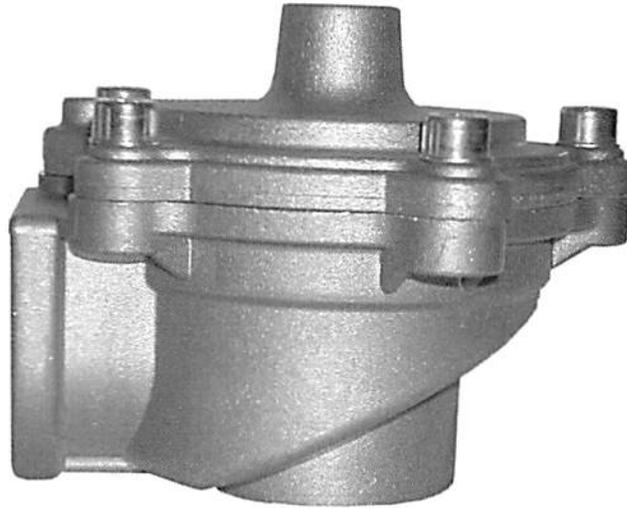

### General description

The **remote pilot** is a range of valves used in filter elements cleaning in air filtration systems with female threaded input and output. The characteristic of these valves is the quick opening with a great volume of air that allows in a short time a high jet and a reduced air consumption. **It is the result of a deep technological research of the internal geometrical characteristics and the new diaphragm guaranteed and tested to operate for over a million of activations.**

### Technical specifications

Static operation	Normally closed
Temperature	
Standard	- 20C° + 100C°
On request	- 30C° + 200C°
Max pressure	8 bar
Connection	3/4" Thread
Material	Die cast aluminium
Fluid	Air or inert Gas
Weight	0,450 Kg

**We improve quality of AIR filtration**


**Autel S.r.l. – Electrical and Electronic Systems for air filtration – [www.aeautel.it](http://www.aeautel.it)**

Via D. Bagnoli n°9, Sassuolo (MO) ITALY. Phone: +39/0536 802104 Fax: +39/0536 803372 Email: [info@aeautel.it](mailto:info@aeautel.it)

# 3/4" VALVES WITH THREADED CONNECTION REMOTE PILOT

AE 28 20 B 000

## Lay-out and dimensions

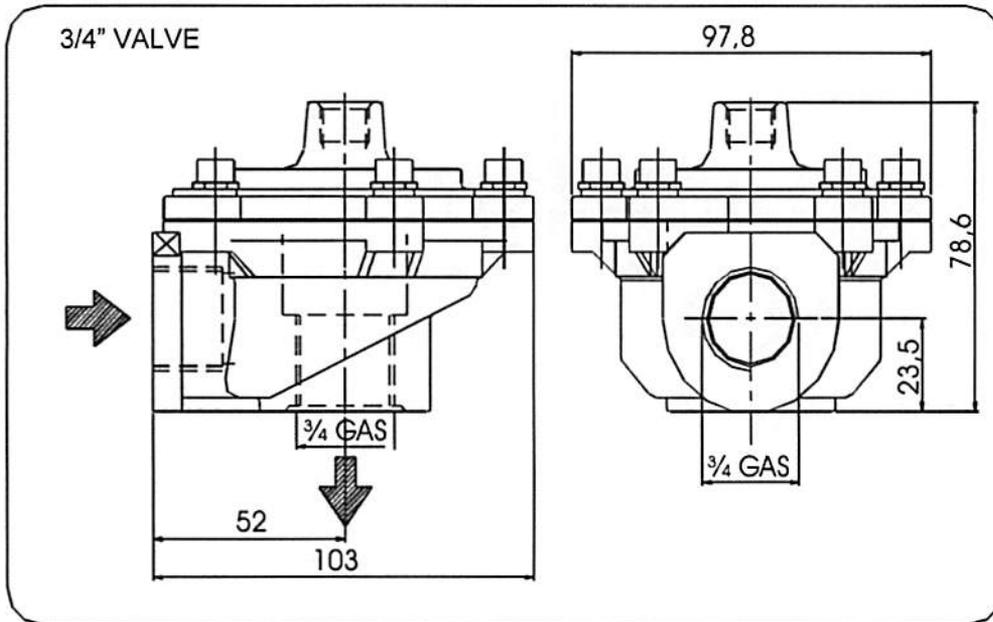

## How to order

**AE 28 20 B 000**

Autel

1: Integral pilot  
2: Remote pilot  
3: Remote pilot +  
Rapid connector

8: Single diaphragm

4: Double diaphragm

Coil voltage

020 DC24V

025 AC24V/50Hz, AC26V/60Hz

115 AC 150V/50Hz 60Hz

225 AC 230V/50Hz 60Hz

B Screw type  
R Coupling  
F Flange  
I Integral

Pipe measure

20 3/4"  
25 1"  
40 1,5"  
50 2"  
60 2,5"  
75 3"

**We improve quality of AIR filtration**