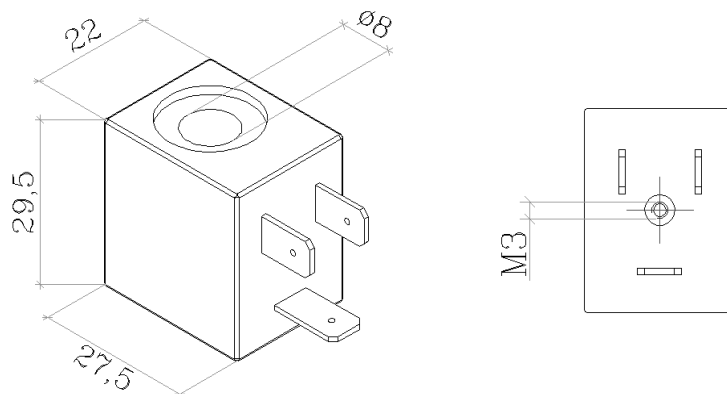


**BC8-24VDC-Autel Coil for Box's Pilot System 8****CARATTERISTICHE**

- Filo di rame: in classe H (180/200°C)
- Classe di isolamento: F (155°C) e H (180/200°C) a norme VDE
- Grado di protezione: IP65 con connettore correttamente montato

**FUNZIONAMENTO**

- Tensione nominale: 24VDC
- Pot. Assorbita a 20°: 6.5W in cc
- Sovratens. massima: 10% del valore nominale
- Temperatura d'uso: Da -30° a +40°C vers. 6.5W

**MATERIALE DI INGLOBAMENTO**

- Esecuzione standard in nylon caricato vetro

**CONNESSIONI ELETTRICHE**

- Attacco a 3 terminali 6.3 mm per connessione a norme DIN 43650

**SPECIFICATIONS**

- Copper wire: H Class (180/200°C)
- Isolation class: F (155°C) and H (180/200°C) according to VDE regulation
- Waterproof level: IP65 with right mounted connector

**WORKING**

- Nominal voltage: 24VDC
- Power abs. at 20 °C: 6.5W in cc
- Max overvoltage: 10% of nominal voltage
- Working temp.: -30° to +70°C 6.5W vers.

**OVERMOULDED MATERIALS**

- Standard materials in Nylon charged glass

**ELECTRIC CONNECTIONS**

- 3 x 6.3mm faston pins for fittings to DIN 43650 connector